




COLOR DOOR CAMERA

WITH 2 WIRES

DRC-22BS/22CS



COMMAX Co.,Ltd.

- Thank you for purchasing our COMMAX product.
- Please carefully read this User Guide (in particular, precautions for safety) before using the product and follow the instructions to use your product exactly.
- The company is not responsible for any safety accidents caused in abnormal operation of the product.

Specification


Spec. Name	DRC-22BS	DRC-22CS
Seonsor Type	B/W C.C.D" 1/3	COLOR C.C.D 1/4"
Wiring	2 wires(Non-Polarity)	
Related voltage	DC 12V(powered from a mointor)	
Transmission	Full duplex	
Effective Viewing Angle	Horizontal 75° Vertical 55°	
Bradcasting	15.625KHz/50Hz, 15.734/60Hz	
Minimum Illumination	OLUX(within 300mm)	
Operating Temperature	-10 ~ +40	
Dimension	99.5(W)×141.5(H)×37(D)	
weight	300g	

Package contents

SCREW : T4X18mm 2EA, M3X10mm 1EA


Manual

Part Names.

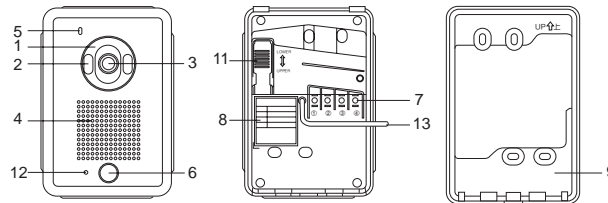

- | | |
|-----------------------|---|
| 1. Protection shield. | 7. Monitor Connection terminal. |
| 2. Lamp at night | 8. Description Label. |
| 3. C.C.D Camera Lens | 9. Bracket mounting a wall |
| 4. Speaker | 10. Dimension(mm) : 99.5(W) x 141.5(H) x 37(D) |
| 5. MIC. | 11. Angle adjustment lever. |
| 6. Call button. | 12. Power lamp : When talking with a monitor, it is on. |
| | 13. Door Release connection terminal |

Wiring and Installation.

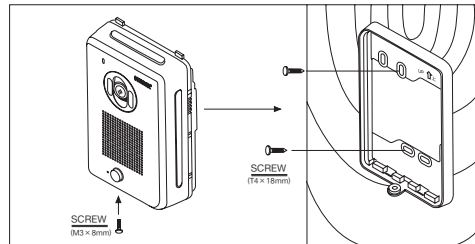

1. Fix a bracket to wall with screws (M3 x 10mm) supplied.
2. Please fix the desired angle of a lens with angle adjustment lever before fixing it.
3. Put a camera unit into a bracket.
4. Recheck the desired position of a camera unit to be installed through the image of a monitor.

